


K-No.: 26392

### 25A Current Sensor

For the electronic measurement of currents:  
DC, AC, pulsed, mixed with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit)



Date: 05.03.2018

Customer: Standard type

Customers Part no:

Page 1 of 5

#### Description

- Closed loop (compensation) Current Sensor with magnetic probe
- Printed circuit board mounting
- Casing and materials UL-listed

#### Characteristics

- excellent accuracy
- very low offset current
- very low temperature dependency and offset current drift
- very low hysteresis of offset current
- short response time
- wide frequency bandwidth
- compact design
- reduced offset ripple

#### Applications

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- Uninterruptable Power Supplies (UPS)

#### Electrical data - Ratings

|          |                               |                 |            |          |
|----------|-------------------------------|-----------------|------------|----------|
| $I_{PN}$ | Primary nominal RMS current   |                 | 25         | A        |
| $R_M$    | Measuring resistance          | $V_C = \pm 12V$ | 10...200   | $\Omega$ |
|          |                               | $V_C = \pm 15V$ | 22...400   | $\Omega$ |
| $I_{SN}$ | Secondary nominal RMS current |                 | 25         | mA       |
| $K_N$    | Transformation ratio          |                 | 1...3:1000 |          |

#### Accuracy – Dynamic performance data

|              |  | min.      | typ. | max. | Unit    |
|--------------|--|-----------|------|------|---------|
| $I_{P,max}$  | Max. measuring range                                       |           |      |      |         |
|              | @ $V_C = \pm 12V$ , $R_M = 10\Omega$ ( $t_{max} = 10sec$ ) | $\pm 120$ |      |      | A       |
|              | @ $V_C = \pm 15V$ , $R_M = 22\Omega$ ( $t_{max} = 10sec$ ) | $\pm 130$ |      |      | A       |
| X            | Accuracy @ $I_{PN}$ , $\theta_A = 25^\circ C$              |           | 0.1  | 0.5  | %       |
| $\epsilon_L$ | Linearity  |           |      | 0.1  | %       |
| $I_O$        | Offset current @ $I_P = 0A$ , $\theta_A = 25^\circ C$      |           | 0.02 | 0.1  | mA      |
| $t_r$        | Response time  |           | 500  |      | $\mu s$ |
| $t_{ra}$     | Reaction time at $di/dt = 100 A/\mu s$                     |           | 200  |      | $\mu s$ |
| $f_{BW}$     | Frequency bandwidth  | DC...200  |      |      | kHz     |

#### General data

|               |  |            |                 |             |            |
|---------------|--|------------|-----------------|-------------|------------|
| $\vartheta_A$ | Ambient operation temperature            | -40        |                 | 85          | $^\circ C$ |
| $\vartheta_S$ | Ambient storage temperature              | -40        |                 | 90          | $^\circ C$ |
| m             | Mass                                     |            | 12              |             | g          |
| $V_C$         | Supply voltage                           | $\pm 11.4$ | $\pm 12/\pm 15$ | $\pm 15.75$ | V          |
| $I_C$         | Supply current at $I_P = 0A$ and RT      |            | 15              |             | mA         |
| * $S_{clear}$ | Clearance (component without solder pad) | 10.2       |                 |             | mm         |
| * $S_{creep}$ | Creepage (component without solder pad)  | 10.2       |                 |             | mm         |
| * $U_{sys}$   | System voltage                           |            |                 | 600         | $V_{RMS}$  |
| * $U_{AC}$    | Working voltage                          |            |                 | 1000        | $V_{RMS}$  |
| * $U_{PD}$    | Rated discharge voltage                  |            |                 | 1414        | $V_S$      |
|               | Max. Potential difference acc. to UL 508 |            |                 | 600         | $V_{AC}$   |

\* Constructed, manufactured and tested in accordance with IEC 61800-5-1:2007 (primary to secondary)  
Reinforced insulation, Insulation material group 1, Pollution degree 2, Overvoltage category III

| Date       | Name | Issue | Amendment   |
|------------|------|-------|---|
| 05.03.2018 | KRe  | 81    | Sheet 4) other instruction changed ( PCBA is covered with conformal coating added). CN-18-044 |
| 13.08.2015 | DJ   | 81    | Marking with UL-sign, General data, routine-tests, Type-tests and Page 5 reworked. CN-15-419  |

Hrg.: R&D-PD NPI  
editor

Bearb.: DJ  
designer


KB-PM: Sn.  
check

freig.: Pr.  
released

K-No.: 26392

### 25A Current Sensor

For the electronic measurement of currents:  
DC, AC, pulsed, mixed with a galvanic Isolation  
between the primary circuit (high power) and the  
secondary circuit (electronic circuit)



Date: 05.03.2018

Customer: Standard type

Customers Part no:


Page 2 of 5

#### Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Connections:

Pin Nr. 1-6: Ø1,0mm  
Pin Nr. 7-9: 0,7 x 0,6mm

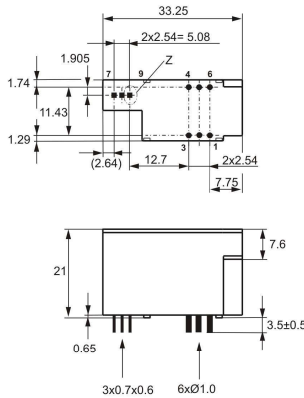

Marking:


4648-X400  
F DC

Explanation:

DC = Date Code  
F = Factory

Current direction: A positive output current appears at point I<sub>S</sub>, if primary current flows in direction of the arrow.

#### Schematic diagram:

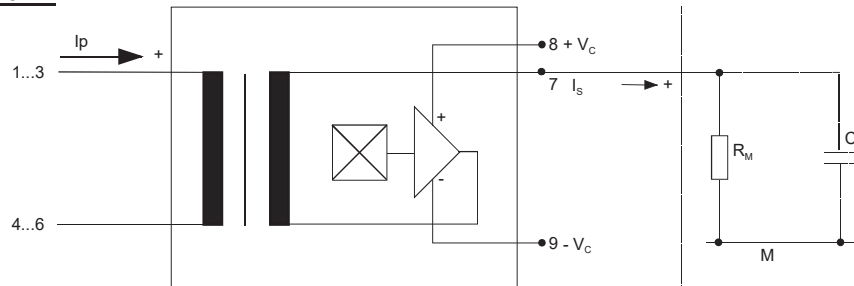

#### Possibility of wiring for V<sub>C</sub> = ±15V (@ θ<sub>A</sub> = 85°C, R<sub>M</sub> = 22Ω)

| Primary-windings | Primary current RMS | Primary current peak   | Output current RMS                    | Transformation-ratio | Primary-resistance  | circuit |
|------------------|---------------------|------------------------|---------------------------------------|----------------------|---------------------|---------|
| N <sub>P</sub>   | I <sub>P</sub> [A]  | I <sub>P,max</sub> [A] | I <sub>S</sub> (I <sub>P</sub> ) [mA] | K <sub>N</sub>       | R <sub>P</sub> [mΩ] |         |
| 1                | 25                  | 130                    | 25                                    | 1:1000               | 0,3                 |         |
| 2                | 10                  | 65                     | 20                                    | 2:1000               | 1,35                |         |
| 3                | 8                   | 43                     | 24                                    | 3:1000               | 2,4                 |         |

Hrg.: R&D-PD NPI editor

Bearb.: DJ designer


KB-PM: Sn. check

freig.: Pr. released

K-No.: 26392

### 25A Current Sensor

For the electronic measurement of currents:  
DC, AC, pulsed, mixed with a galvanic Isolation  
between the primary circuit (high power) and the  
secondary circuit (electronic circuit)



Date: 05.03.2018

Customer: Standard type

Customers Part no:

Page 3 of 5

#### Electrical data (investigate by a type checking)

|                           |  | min. | typ.  | max.     | Unit       |
|---------------------------|--|------|-------|----------|------------|
| $V_{C, tot}$              | maximum supply voltage (without function)<br>$\pm 15,75V$ to $\pm 18V$ : for 1s per hour |      |       | $\pm 18$ | V          |
| $R_S$                     | Secondary coil resistance @ $T_A = 85^\circ C$   |      |       | 88       | $\Omega$   |
| $R_P$                     | Primary coil resistance per turn @ $T_A = 25^\circ C$                                    |      |       | 1        | m $\Omega$ |
| $X_{TI}$                  | Temperature drift of X @ $T_A = -40^\circ C \dots 85^\circ C$                            |      |       | 0.1      | %          |
| $I_{O, ges}$              | Offset current (including $I_O, I_{OT}, I_{OT}$ )  |      |       | 0.15     | mA         |
| $I_{Ot}$                  | Long term drift offset current von $I_O$   |      | 0.05  |          | mA         |
| $I_{OT}$                  | Offset current temperature drift<br>$I_O$ @ $T_A = -40^\circ C \dots 85^\circ C$         |      | 0.05  |          | mA         |
| $I_{OH}$                  | Hysteresis current @ $I_P = 0A$<br>(caused by $I_P = 3 \times I_{PN}$ )                  |      | 0.04  | 0.1      | mA         |
| $\Delta I_O / \Delta V_C$ | Supply voltage rejection ratio   |      |       | 0.01     | mA/V       |
| $i_{OSS}$                 | Offsetripple* (with 1 MHz-Filter, first order)   |      |       | 0.4      | mA         |
| $i_{OSS}$                 | Offsetripple* (with 100 kHz-Filter, first order)   |      | 0.025 | 0.15     | mA         |
| $i_{OSS}$                 | Offsetripple* (with 20 kHz-Filter, first order)  |      | 0.001 | 0.04     | mA         |
| $C_k$                     | Maximum possible coupling capacity<br>(primary - secondary)                              |      |       | 6        | pF         |
|                           | Mechanical stress according to M3209/3<br>Settings: 10-2000Hz, 1min/oct, 2 hours         |      |       | 10       | g          |

#### Routine-Tests: (Measurement after temperature balance of the samples at room temperature, SC = significant characteristic)

|                  |                 |  |  |                     |                   |
|------------------|-----------------|--|--|---------------------|-------------------|
| $K_N$ (SC)       | (100%) M3011/6: | Transformation ratio                   |  | $3:1000 \pm 0,5 \%$ |                   |
| $I_O$            | (100%) M3226:   | Offset current                         |  | < 0.1               | mA                |
| $U_P$            | (100%) M3014:   | Test voltage, 1s                       |  | 2.5                 | kV <sub>RMS</sub> |
| $U_{PDE}$        | (AQL 1/S4)      | Partial discharge voltage (extinction) |  | 1.5                 | kV <sub>RMS</sub> |
| $U_{PD} * 1.875$ | M3024:          | *acc. table 24                         |  | 1.875               | kV <sub>RMS</sub> |

#### Type-Tests: (Precondition acc. to M3236)

|                  |  |  |       |  |                   |
|------------------|--|--|-------|--|-------------------|
| $\hat{U}_W$      | HV transient test acc. table 18,19 (1,2 $\mu$ s / 50 $\mu$ s-Waveform) |  | 8     |  | kV                |
| $U_P$            | Test voltage acc. to M3014, 5s   |  | 5     |  | kV <sub>RMS</sub> |
| $U_{PDE}$        | Partial discharge voltage (extinction)                                 |  | 1.5   |  | kV <sub>RMS</sub> |
| $U_{PD} * 1.875$ | *acc. table 24   |  | 1.875 |  | kV <sub>RMS</sub> |

\*IEC 61800-5-1:2007

Hrg.: R&D-PD NPI  
editor

Bearb.: DJ  
designer


KB-PM: Sn.  
check

freig.: Pr.  
released

K-No.: 26392

### 25A Current Sensor

For the electronic measurement of currents:  
DC, AC, pulsed, mixed with a galvanic Isolation  
between the primary circuit (high power) and the  
secondary circuit (electronic circuit)




Date: 05.03.2018

Customer: Standard type


Customers Part no:

Page 4 of 5

**Limit curve of measurable current of N4648-X400**

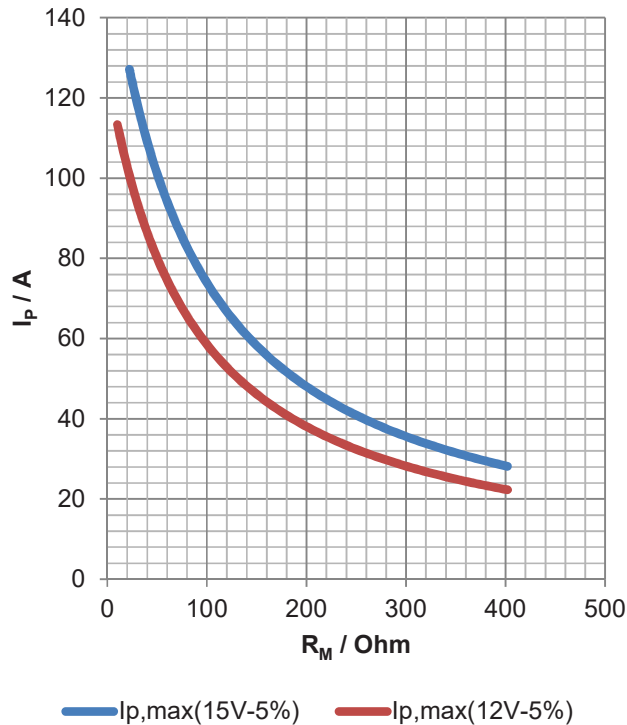

**4648-X400, R<sub>m</sub> = 10Ω, I<sub>p</sub> = 500A**

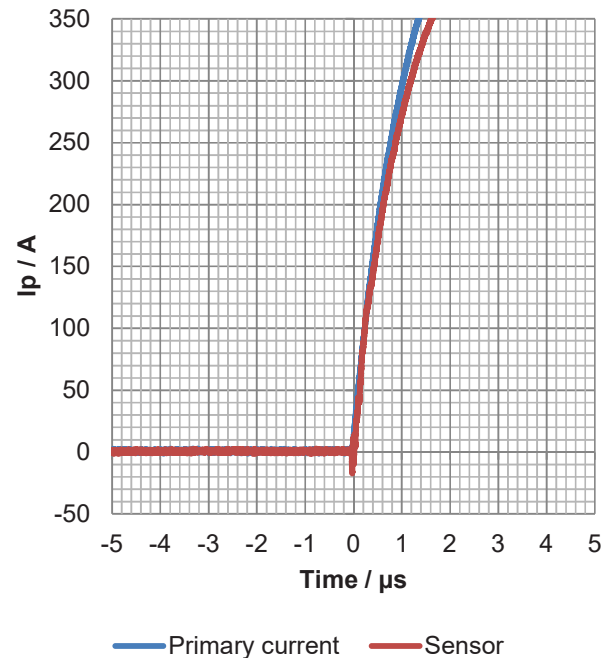

Fast increasing currents (higher than the specified I<sub>p,max</sub>), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly and be limited by diodes only.

### \*Possible way to reduce the Offset ripple by a Low-Pass-Filter

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1<sup>st</sup> order with cutoff frequency:

$$f_g = \frac{1}{2 * \pi * R_M * C_a}$$

In this case the response time is enlarged:

$$t'_r \leq t_r + 2,5R_M C_a$$

### Other instructions

- An exceptionally high rate of on/off – switching of the power supply voltage accelerates the aging process of the sensor
- Constructed, manufactured and tested in accordance with IEC 61800-5-1:2007.
- Temperature of the primary conductor should not exceed 100°C.
- Housing and bobbin material UL-listed: Flammability class 94V-0.
- PCBA is covered with conformal coating

Hrg.: R&D-PD NPI  
editor

Bearb.: DJ  
designer


KB-PM: Sn.  
check

freig.: Pr.  
released

K-No.: 26392

### 25A Current Sensor

For the electronic measurement of currents:  
DC, AC, pulsed, mixed with a galvanic Isolation  
between the primary circuit (high power) and the  
secondary circuit (electronic circuit)



Date: 05.03.2018

Customer: Standard type

Customers Part no:

Page 5 of 5

#### Explanation of several terms used in the tables:

$I_{OH}$ : Zero variation after overloading with a DC of tenfold the rated value. ( $R_M=R_{MN}$ )

$I_{oi}$ : Long term drift of  $I_o$  after 100 temperature cycles in the range  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

$t_r$ : Response time, measured as a delay time at  $I_P = 0.9 * I_{Pmax}$  between a rectangular primary current and the output current.

$t_{ra}$ : Reaction time, measured as a delay time at  $I_P = 0.1 * I_{Pmax}$  between a rectangular primary current and the output current. (with  $di/dt = 100\text{A}/\mu\text{s}$ )

$X_{ges}(I_{PN})$ : The sum of all possible errors over the temperature range by measuring a current  $I_{PN}$ :

$$X_{ges} = 100 * \left| \frac{I_S * (I_{PN})}{K_N * I_{PN}} - 1 \right|$$

$X$ : Permissible measurement error in the final inspection at RT, defined by

$$X = 100 * \left| \frac{I_{SB}}{I_{SN}} - 1 \right|$$

where  $I_{SB}$  is the output DC value of an input DC current of the same magnitude as the (positive) rated current ( $I_o=0$ ).

$X_{Ti}$ : Temperature drift of the rated value orientated output term.  $I_{SN}$  in a specified temperature range, obtained by:

$$X_{Ti} = 100 * \left| \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right|$$

$\epsilon_L$ : Linearity fault defined by:  $\epsilon_L = 100 * \left| \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right|$

Where  $I_P$  is any input DC current and  $I_{Sx}$  the corresponding output term. ( $I_o = 0$ ).

